

Solljus High Bay Compact

60-240W LED Specification



Parameters:


L70B10	150.000 h
L80B10	100.000 h
L90B10	50.000 h

Product Model:	High Bay Compact
LED Chip Brand:	Nichia
Dali driver:	Incl.
Light Efficiency:	160 lm/W
Color Temperature:	4000K
Beam Angle:	90° (60°, 120° optional)
Total Power Consumption:	65 - 240±5W
Output Current:	5.2A (constant current)
Net Weight:	2,4 - 4,5Kg
Power Cable:	0,3m, alt. 1,5m
Dali Cable:	0,3m
Working Temperature:	-40°C ~ +50°C
Light Dimension: 60, 100, 150W	L250mm*W250mm*H190mm
200, 240W	L320mm*W320mm*H200mm


Lumen Output:

60W - 8400 lm
100W - 14000 lm
150W - 21000 lm
200W - 28400 lm
240W - 33600 lm

Light Distribution:

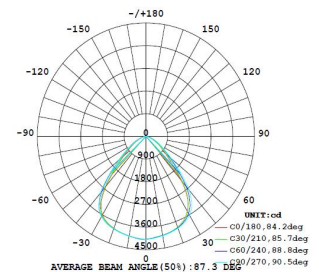

Physical Dimensions

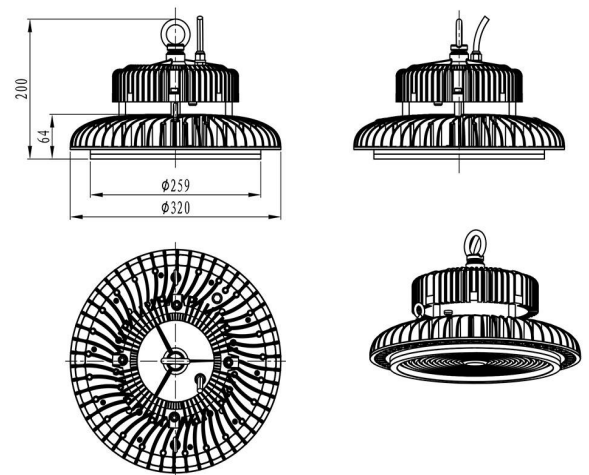

≥0.95	85 Ra	IP65	≥150000 Hrs	AC 100-277V	47-63Hz
Power Factor	CRI	IP Level	TM-21(L70)	Input Voltage	Power Frequency



Suitable for Industries, Workshops, Warehouses, Sport Arenas, and other Lighting Purposes.

www.solljus.se

Ver. 20181005